






D08 Standard Flow Parallel Manifold

1

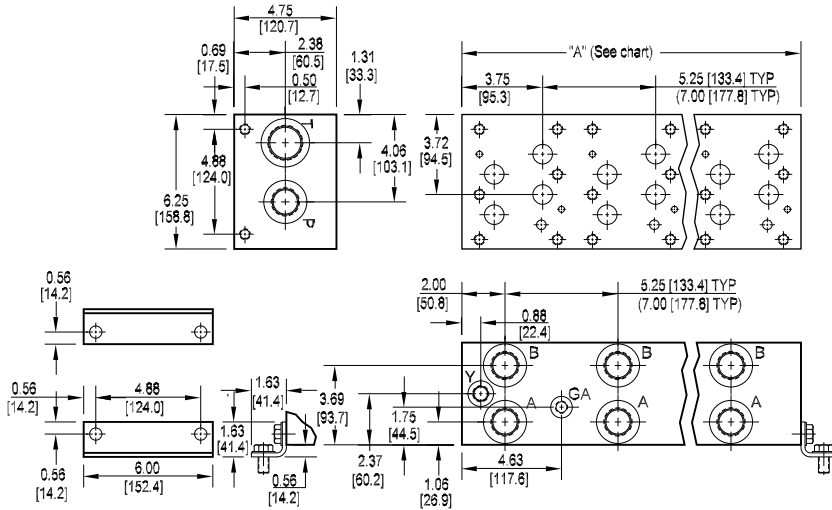

Rated flow Pressure 41 gpm @ 15 fps
Rated flow Tank 72 gpm @ 15 fps

No. of stations	01	02	03	04	05	06	07
"A" length (code 5 spa.) inch [mm]	5.25 [133.4]	10.50 [266.7]	15.75 [400.1]	21.00 [533.4]	26.25 [666.8]	31.50 [800.1]	36.75 [933.5]
apx. weight alum lb [kg]	12 [5]	24 [11]	35 [16]	49 [22]	61 [28]	75 [34]	89 [40]
apx. weight iron lb [kg]	45 [20]	90 [41]	136 [62]	181 [82]	226 [103]	271 [123]	356 [162]
"A" length (code 7 spa.) inch [mm]	--	12.25 [311.2]	19.25 [489.0]	26.25 [666.8]	33.25 [844.6]	--	--
apx. weight alum lb [kg]	--	28 [13]	44 [20]	64 [29]	74 [34]	--	--
apx. weight iron lb [kg]	--	105 [48]	166 [75]	226 [103]	286 [130]	--	--

All mounting hardware is supplied.
See page 36 for itemized list.

Port code	Valve mtg.	Manifold mtg.
P, S	0.50-13 UNC x 1.19 [30] DP	0.50-13 UNC x 0.88 [22.3] DP
B, M, T	M12 ISO 6H x 1.19 [30] DP	M12 ISO 6H x 0.88 [22.3] DP

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation.


Ordering Information

Material	Valve Pattern	Circuit	No. of Stations	Valve Spacing	Port Threads	Options																																																																																														
<table border="1"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>Aluminum - 6061-T6 3000 psi • 20.7 MPa</td> </tr> <tr> <td>D</td> <td>Ductile Iron - D4512 5000 psi • 34.5 MPa</td> </tr> </tbody> </table>	Material		A	Aluminum - 6061-T6 3000 psi • 20.7 MPa	D	Ductile Iron - D4512 5000 psi • 34.5 MPa	<table border="1"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td>D08</td> <td>ISO 4401-08-07 NFFPA T3.5.1-D08 See section 9</td> </tr> </tbody> </table>	Valve Pattern		D08	ISO 4401-08-07 NFFPA T3.5.1-D08 See section 9	<table border="1"> <thead> <tr> <th colspan="2">Circuit</th> </tr> </thead> <tbody> <tr> <td>P</td> <td>Parallel Circuit Standard Flow</td> </tr> </tbody> </table>	Circuit		P	Parallel Circuit Standard Flow	<table border="1"> <thead> <tr> <th colspan="2">No. of Stations</th> </tr> </thead> <tbody> <tr> <td colspan="2">Aluminum</td> </tr> <tr> <td>01...07</td> <td>Available with spacing code 5</td> </tr> <tr> <td>02...05</td> <td>Available with spacing code 7</td> </tr> <tr> <td colspan="2">Ductile Iron</td> </tr> <tr> <td>01...07</td> <td>Available with spacing code 5</td> </tr> <tr> <td>02...05</td> <td>Available with spacing code 7</td> </tr> </tbody> </table>	No. of Stations		Aluminum		01...07	Available with spacing code 5	02...05	Available with spacing code 7	Ductile Iron		01...07	Available with spacing code 5	02...05	Available with spacing code 7	<table border="1"> <thead> <tr> <th colspan="2">Valve Spacing</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>5.25 inch 133.4 mm</td> </tr> <tr> <td>7</td> <td>7.00 inch 177.8 mm</td> </tr> </tbody> </table>	Valve Spacing		5	5.25 inch 133.4 mm	7	7.00 inch 177.8 mm	<table border="1"> <thead> <tr> <th colspan="7">Port Threads</th> </tr> </thead> <tbody> <tr> <th>P</th> <th>S</th> <th>B</th> <th>M</th> <th>T</th> <th>X optional</th> <th>GA</th> </tr> <tr> <td>NPTF • ANSI B1.20.3</td> <td>SAE • ISO 11926</td> <td>BSP • ISO 1179</td> <td>ISO • ISO 6149</td> <td>BSPT • ISO 7</td> <td></td> <td></td> </tr> <tr> <td>1.00</td> <td>-16</td> <td>1.00</td> <td>M33</td> <td>1.00</td> <td></td> <td></td> </tr> <tr> <td>1.25</td> <td>-20</td> <td>1.25</td> <td>M42</td> <td>1.25</td> <td></td> <td></td> </tr> <tr> <td>0.38</td> <td>-8</td> <td>0.38</td> <td>M14</td> <td>0.38</td> <td></td> <td></td> </tr> <tr> <td>0.25</td> <td>-4</td> <td>0.25</td> <td>M10</td> <td>0.25</td> <td></td> <td></td> </tr> <tr> <td>0.25</td> <td>-6</td> <td>none</td> <td>none</td> <td>0.25</td> <td></td> <td></td> </tr> </tbody> </table>	Port Threads							P	S	B	M	T	X optional	GA	NPTF • ANSI B1.20.3	SAE • ISO 11926	BSP • ISO 1179	ISO • ISO 6149	BSPT • ISO 7			1.00	-16	1.00	M33	1.00			1.25	-20	1.25	M42	1.25			0.38	-8	0.38	M14	0.38			0.25	-4	0.25	M10	0.25			0.25	-6	none	none	0.25			<table border="1"> <thead> <tr> <th colspan="2">Options</th> </tr> </thead> <tbody> <tr> <td colspan="2">See next page for available options and ordering codes.</td> </tr> </tbody> </table>	Options		See next page for available options and ordering codes.	
Material																																																																																																				
A	Aluminum - 6061-T6 3000 psi • 20.7 MPa																																																																																																			
D	Ductile Iron - D4512 5000 psi • 34.5 MPa																																																																																																			
Valve Pattern																																																																																																				
D08	ISO 4401-08-07 NFFPA T3.5.1-D08 See section 9																																																																																																			
Circuit																																																																																																				
P	Parallel Circuit Standard Flow																																																																																																			
No. of Stations																																																																																																				
Aluminum																																																																																																				
01...07	Available with spacing code 5																																																																																																			
02...05	Available with spacing code 7																																																																																																			
Ductile Iron																																																																																																				
01...07	Available with spacing code 5																																																																																																			
02...05	Available with spacing code 7																																																																																																			
Valve Spacing																																																																																																				
5	5.25 inch 133.4 mm																																																																																																			
7	7.00 inch 177.8 mm																																																																																																			
Port Threads																																																																																																				
P	S	B	M	T	X optional	GA																																																																																														
NPTF • ANSI B1.20.3	SAE • ISO 11926	BSP • ISO 1179	ISO • ISO 6149	BSPT • ISO 7																																																																																																
1.00	-16	1.00	M33	1.00																																																																																																
1.25	-20	1.25	M42	1.25																																																																																																
0.38	-8	0.38	M14	0.38																																																																																																
0.25	-4	0.25	M10	0.25																																																																																																
0.25	-6	none	none	0.25																																																																																																
Options																																																																																																				
See next page for available options and ordering codes.																																																																																																				




Options - D08 Standard Flow Parallel Manifold

Contact Daman or consult CD-rom CADalog for cavity locations if critical.

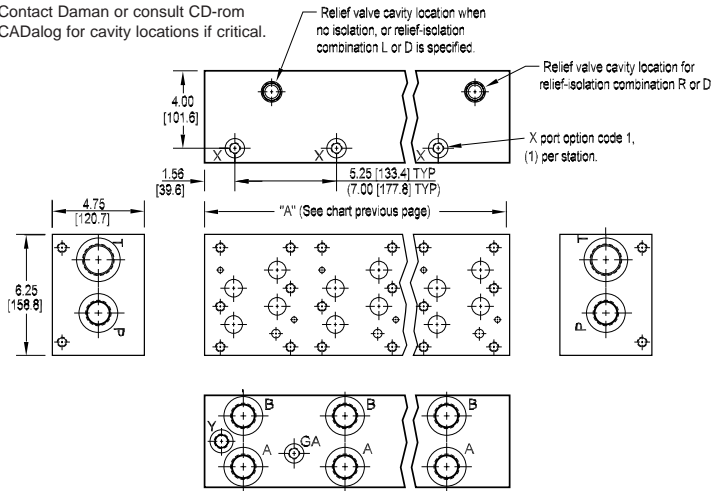

Parallel Circuit with X




ISOLATIONS

Daman isolation options allow a manifold to have two independent pressure and/or tank ports. Isolations are drilled rather than plugged to ensure a leakproof and failproof isolation.


Ordering code letter:	* Isolation is between stations:	Available # of stations:
5.25 [133.4] spacing		
A	01 & 02	02-07
B	02 & 03	03-07
C	03 & 04	04-07
D	04 & 05	05-07
E	05 & 06	06-07
F	06 & 07	07
7.00 [177.8] spacing		
A	01 & 02	02-05
B	02 & 03	03-05
C	03 & 04	04-05
D	04 & 05	05

* Stations are numbered left to right.


Parallel Circuit with Relief



Parallel Circuit with Isolations

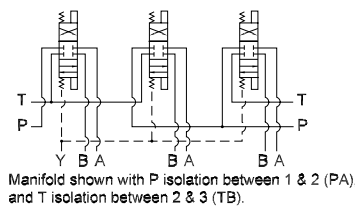

Relief / Isolation Combination

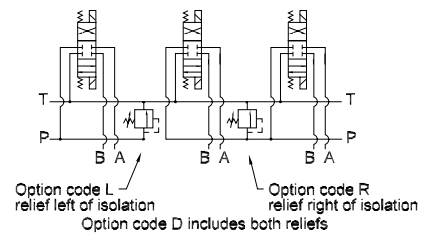

Ordering Information

