

600 PSI Test Kits

For Air and Other Compressed Gases

- Direct reading
- Install in any position
- 360° Rotatable Guard/Scale
- Easier to Read Linear Scale
- No Flow Straighteners or Special Piping Required
- Insensitive to Shock and Vibration
- Temperature up to 240°F
- Accuracy $\pm 2\%$ Full Scale
- Repeatability $\pm 1\%$
- Special Scales Available
- Calibrated for 1.0 S.G.



SPECIFICATIONS:

MATERIALS:

2024 - T351 Anodized aluminum body, piston and cone

C360 Brass body, piston and cone

T303 Stainless body, 2024 - T351 Anodized aluminum piston and cone

COMMON PARTS:	Retaining Ring: T316 SS
Spider Plate: T316 SS	Retaining Spring: T316 SS
Spring: T302 SS	Indicator and Internal Magnet: PPS / Ceramic
Fasteners: T303 SS	Guard Seal / Bumper: Buna N
Pressure Seals: Viton®	Scale Support: 6063 - T6 Aluminum
Guard: Polycarbonate	End Caps: Nylon ST

THREADS: SAE J1926/1, NPTF ANSI B2.2, BSPP ISO1179

TEMPERATURE RANGE: -20 to 240°F (-29 to 116°C)

PRESSURE RATING:

Aluminum / Brass Operating: 600 psi/41 bar max., with a 10:1 safety factor.

Fatigue Rating: per NFPA T2.6.1R1-1991, (for details see page 7)

Stainless Steel Operating: 600 psi/41 bar max., with a 10:1 safety factor.

Fatigue Rating: per NFPA T2.6.1R1-1991, (for details see page 7)

PRESSURE DROP: See Ordering Information Table, page 38. For detailed differential pressure charts, see page 56.


ACCURACY: $\pm 2\%$ of full scale reading

REPEATABILITY: $\pm 1\%$

PRESSURE GAUGE: Glycerin dampened, 0 - 160 psi / 0 - 10 bar pressure range. Available in all test kits.

LOAD VALVE: 1/2" to 1-1/2" nickel-plated brass ball valve with chrome-plated brass ball and teflon seals.

SILENCER (optional) : Brass body with 40 micron porous sintered bronze filter.

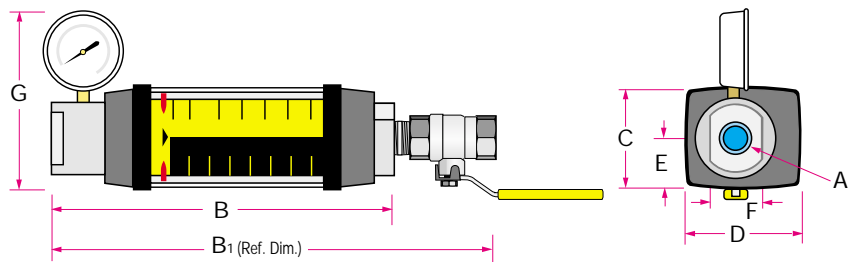

DIMENSIONS:

A	B	B ₁	C	D	E	F	G
NOMINAL PORT SIZE	LENGTH in (mm)	LENGTH in (mm)	WIDTH in (mm)	DEPTH in (mm)	OFFSET in (mm)	FLATS in (mm)	HEIGHT in (mm)
1/4 (SAE 6)	6.12 (155)	8.38 (213)	1.68 (43)	1.90 (48)	.84 (21)	.88 (22)	5.0 (127)
1/2 (SAE10)	8.00 (203)	11.0 (279)	2.07 (53)	2.40 (61)	1.04 (26)	1.25 (32)	5.4 (137)
3/4 (SAE 12)	8.90 (226)	12.38 (315)	2.48 (63)	2.85 (72)	1.24 (32)	1.50 (38)	5.9 (150)
1 (SAE 16)	8.90 (226)	12.38 (315)	2.48 (63)	2.85 (72)	1.24 (32)	1.50 (38)	5.9 (150)
1-1/4 (SAE 20)	13.80 (351)	18.39 (465)	4.12 (105)	4.72 (120)	2.06 (52)	2.75 (70)	7.2 (183)
1-1/2 (SAE 24)	13.80 (351)	18.39 (465)	4.12 (105)	4.72 (120)	2.06 (52)	2.75 (70)	7.2 (183)

NOTE: Dimensions for 1-1/2" Code 62, 3" and 3" Code 61 can be found on page 50.

Weights for all sizes can be found on page 57.

BSPP Test Kits include outlet adapter.

600 PSI Test Kits

For Air and Other Compressed Gases

ORDERING INFORMATION:

NOMINAL PORT SIZE	FLOW RANGE		PRESSURE DROP		MODEL NUMBER (see ex. below*)		MATERIAL		
	① SCFM	② L/SEC	50% FLOW PSI (BAR)	100% FLOW PSI (BAR)	NPTF	BSPP	ALUMINUM 600 PSI	BRASS 600 PSI	STAINLESS 600 PSI
1/4 SAE 6	0.5 - 5	0.2 - 2.2	5.25 (.36)	8.37 (.58)	H271 * - 005 - TK	H272 * 005 - TK	A	B	S
	1 - 10	0.5 - 4.75	7.12 (.49)	11.50 (.79)	H271 * - 010 - TK	H272 * 010 - TK			
	2 - 20	1 - 9	7.37 (.51)	13.37 (.92)	H271 * - 020 - TK	H272 * 020 - TK			
	3 - 30	1.5 - 14	11.62 (.80)	22.12 (1.53)	H271 * - 030 - TK	H272 * 030 - TK			
1/2 SAE 10	3 - 25	2 - 12	6.50 (.45)	10.25 (.71)	H671 * - 025 - TK	H672 * 025 - TK	A	B	S
	5 - 50	3 - 22	5.25 (.36)	8.37 (.58)	H671 * - 050 - TK	H672 * 050 - TK			
	10 - 100	5 - 47	3.87 (.27)	7.75 (.53)	H671 * - 100 - TK	H672 * 100 - TK			
	15 - 150	7 - 70	9.00 (.62)	19.62 (1.35)	H671 * - 150 - TK	H672 * 150 - TK			
3/4 SAE 12	3 - 25	1.5 - 11.5	3.37 (.23)	4.87 (.34)	H771 * - 025 - TK	H772 * 025 - TK	A	B	S
	5 - 50	2 - 23	2.75 (.19)	4.00 (.28)	H771 * - 050 - TK	H772 * 050 - TK			
	10 - 100	5 - 47.5	3.37 (.23)	5.62 (.39)	H771 * - 100 - TK	H772 * 100 - TK			
	15 - 150	7 - 70	6.50 (.45)	11.81 (.81)	H771 * - 150 - TK	H772 * 150 - TK			
	25 - 250	10 - 118	8.37 (.58)	17.75 (1.22)	H771 * - 250 - TK	H772 * 250 - TK			
1 SAE 16	3 - 25	1.5 - 15	3.37 (.23)	4.87 (.34)	H791 * - 025 - TK	H792 * 025 - TK	A	B	S
	5 - 50	2 - 23	2.75 (.19)	4.00 (.28)	H791 * - 050 - TK	H792 * 050 - TK			
	10 - 100	5 - 47.5	3.37 (.23)	5.62 (.39)	H791 * - 100 - TK	H792 * 100 - TK			
	15 - 150	7 - 70	6.50 (.45)	11.81 (.81)	H791 * - 150 - TK	H792 * 150 - TK			
	25 - 250	10 - 118	8.37 (.58)	17.75 (1.22)	H791 * - 250 - TK	H792 * 250 - TK			
1-1/4 SAE 20	20 - 200	10 - 95	2.87 (.20)	4.00 (.28)	H871 * - 200 - TK	H872 * 200 - TK	A	B	S
	40 - 400	20 - 180	4.00 (.28)	6.47 (.45)	H871 * - 400 - TK	H872 * 400 - TK			
	60 - 600	30 - 280	5.25 (.36)	9.62 (.66)	H871 * - 600 - TK	H872 * 600 - TK			
	80 - 800	50 - 350	6.47 (.45)	12.87 (.89)	H871 * - 800 - TK	H872 * 800 - TK			
	100 - 1000	50 - 475	7.87 (.54)	17.12 (1.18)	H871 * - 999 - TK	H872 * 999 - TK			
1-1/2 SAE 24	20 - 200	10 - 95	2.87 (.20)	4.00 (.28)	H891 * - 200 - TK	H892 * 200 - TK	A	B	S
	40 - 400	20 - 180	4.00 (.28)	6.47 (.45)	H891 * - 400 - TK	H892 * 400 - TK			
	60 - 600	30 - 280	5.25 (.36)	9.62 (.66)	H891 * - 600 - TK	H892 * 600 - TK			
	80 - 800	50 - 350	6.47 (.45)	12.87 (.89)	H891 * - 800 - TK	H892 * 800 - TK			
	100 - 1000	50 - 475	7.87 (.54)	17.12 (1.18)	H891 * - 999 - TK	H892 * 999 - TK			

Note: Consult factory for other options.

- ① SCFM/PSI multipressure scales are standard.
- ② L/sec-bar multipressure scales are available at no extra charge.

⚠ **Caution:** When ordering a L/sec-bar scale add "S1" suffix to part number

(example) H771 ^{*}A - 250 - [†]TK - S1

(example) H 771 ^{*}A - 250 - TK

AIR & CORROSIVE GASES

PAGE 33



AIR & COMPRESSED GASES

PAGE 35



FLOW ALERT FLOW SWITCHES

PAGE 39



FLOW TRANSMITTERS

PAGE 41

