

# NASON




## MODEL HT

- SNAP ACTION SWITCH
- RUGGED BELLOWS ACTUATING MECHANISM
- NEMA 4, 13

### OPTIONS

- 25 AMP CONTACT
- GOLD CONTACT FOR LOW CURRENT APPLICATION
- BASE CONSTRUCTION FOR 5000 PSI

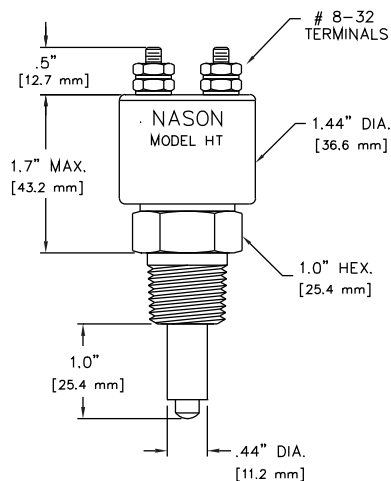

## STANDARD SPECIFICATIONS

Set Point Range:	40° - 300°F	(4° - 149°C)
Set Point Tolerance:	±5°F	(1.7°C)
Maximum Temperature:	100°F ABOVE SET POINT (325°F MAX)	
Differential:	8-16°F	
Current Rating:	10 AMP	
Media Connection:	1/2" NPT MALE BRASS	
Circuit Form:	SPST-NO or SPST-NC	
Electrical Connection:	8-32 SCREW TERMINALS	
Maximum External Pressure:	500 PSI	

## OPTIONAL SPECIFICATIONS

Example - how to order: HT- 2 A - 1 0 0 R /

HT-   -    /

### MEDIA CONNECTION

- 1- 1/2" NPT MALE
- 2- 3/8" NPT MALE
- 6- M-16 X 1.5
- 7- 1/2" BSPP MALE (G 1/2")

### CIRCUIT FORM

- A - SP ST-NO
- B - SP ST-NC
- C - SPDT

### FIXED SET POINT

40°F - 300°F

### SETTING DIRECTION

- R - RISING
- F - FALLING

### ELECTRICAL OPTIONS

- WL- WIRE LEADS
- QC- 1/4" SPADE CONNECTION
- WP- WEATHER PACK
- HR- DIN43650A CONNECTOR
- EL- 1/2" CONDUIT CONNECTION
- MP- METRI-PACK
- GG- INTERNAL GROUND
- AU- GOLD CONTACTS