

# NASON


## MODEL NS (formerly NSM)



- SNAP ACTION SWITCH
- FACTORY PRESET/FIELD ADJUSTABLE
- NEMA 4, 13

### OPTIONS

- 10 AMP CONTACT
- GOLD CONTACT FOR LOW CURRENT APPLICATIONS
- WIDE RANGE OF DIAPHRAGM MATERIALS

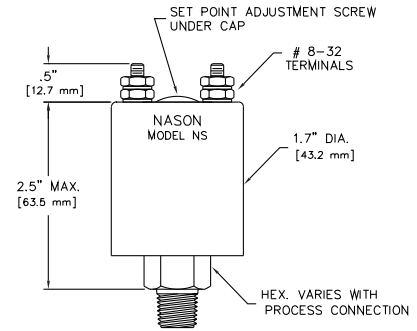

### STANDARD SPECIFICATIONS

Set Point Range:	2 - 100 PSI	(.13 - 6.9 BAR)
Set Point Tolerance:	±1 PSI OR 5%	(.07 BAR)
Maximum Operating Pressure:	250 PSI	(17 BAR)
Proof Pressure:	750 PSI	(51 BAR)
Differential:	8-16%	
Current Rating:	5 AMP	
Media Connection:	1/4" NPT MALE ZINC	
Circuit Form:	SPST-NO or SPST-NC	
Electrical Connection:	8-32 SCREW TERMINALS	
Diaphragm Material:	BUNA N	

### OPTIONAL SPECIFICATIONS

Example - how to order: **NS- 1 A - 3 5 R / WL**

NS-   -    /

#### MEDIA CONNECTION

- 1- 1/4" NPT MALE ZINC
- 2- 1/8" NPT MALE ZINC
- 6- 7/16"-20 SAE O-RING (-4) BRASS
- 14- 1/2" NPT MALE-1/8" NPT FEMALE BRASS
- 17- 1/4" BSPP MALE ( G 1/4") BRASS
- 25- 1/4" NPT MALE NYLON

#### ADJUSTMENT RANGES

- 1.5 - 5 PSI
- 6 - 15 PSI
- 16 - 40 PSI
- 41 - 100 PSI

#### CIRCUIT FORM

- A - SPST-NO
- B - SP ST-NC
- C - SPDT

#### SETTING DIRECTION

- R - RISING
- F - FALLING
- J - RISING ADJUSTABLE
- G - FALLING ADJUSTABLE

#### ELECTRICAL OPTIONS

- WL- WIRE LEADS 18"
- QC- 1/4" SPADE CONNECTION
- WP- WEATHER PACK
- HR- DIN43650A CONNECTOR
- MP- METRI-PACK
- AT - 10 AMP
- GG - INTERNAL GROUND
- AU - GOLD CONTACTS