

NASON


MODEL NV (formerly NSMV)



- SNAP ACTION SWITCH
- FACTORY PRESET/FIELD ADJUSTABLE
- NEMA 4, 13

OPTIONS

- 10 AMP CONTACT
- GOLD CONTACT FOR LOW CURRENT APPLICATIONS
- WIDE RANGE OF DIAPHRAGM MATERIALS

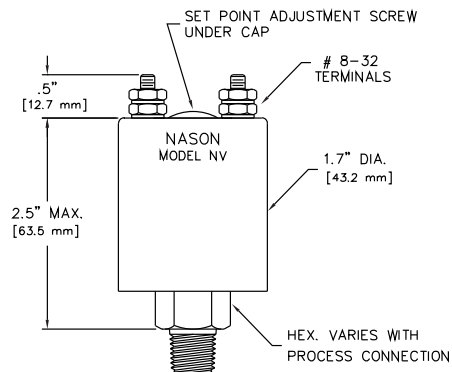

STANDARD SPECIFICATIONS

Set Point Range:	3" - 30" Hg	(76mm - 762mm Hg)
Set Point Tolerance:	±1" Hg OR 5%	(25mm Hg)
Maximum Operating Pressure:	250 PSI	(17 BAR)
Current Rating:	5 AMP	
Differential:	20-40%	
Media Connection:	1/4" NPT MALE ZINC	
Circuit Form:	SPST-NO or SPST-NC	
Electrical Connection:	8-32 SCREW TERMINALS	
Diaphragm Material:	BUNA N	

OPTIONAL SPECIFICATIONS

Example - how to order: **NV-25A - 20R / QC**

NV- - /

MEDIA CONNECTION

- 1- 1/4" NPT MALE
- 17- 1/4" BSPP MALE (G 1/4") MALE BRASS
- 25- 1/4" NPT MALE NYLON

CIRCUIT FORM

- A - SPST-NO
- B - SPST-NC
- C - SPDT

ADJUSTMENT RANGE

- 3-12" HG
- 8-30" HG

SETTING DIRECTION

- R - RISING
- F - FALLING
- J - RISING ADJUSTABLE
- G - FALLING ADJUSTABLE

ELECTRICAL OPTIONS

- WL- WIRE LEADS 18"
- QC- 1/4" SPADE CONNECTION
- WP- WEATHER PACK
- HR- DIN43650A CONNECTOR
- MP- METRI-PACK
- AT - 10 AMP
- GG - INTERNAL GROUND
- AU - GOLD CONTACTS