

NASON


MODEL SM



- SNAP ACTION SWITCH
- FACTORY PRESET
- NEMA 4, 13

OPTIONS

- 10 AMP CONTACT
- GOLD CONTACT FOR LOW CURRENT APPLICATION
- WIDE RANGE OF DIAPHRAGM MATERIALS

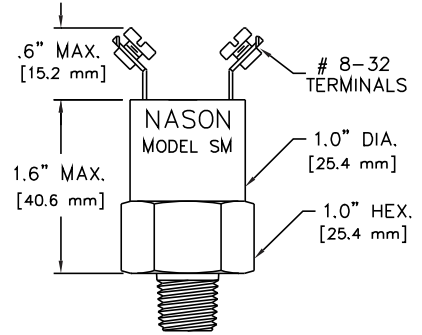

STANDARD SPECIFICATIONS

Set Point Range:	2 - 120 PSI	(.14 - 8.3 BAR)
Set Point Tolerance:	±1 PSI or 5%	(.07 BAR)
Maximum Operating Pressure:	250 PSI	(17 BAR)
Proof Pressure:	750 PSI	(51 BAR)
Differential:	8-16%	
Current Rating:	5 AMP	
Media Connection:	1/8" NPT MALE BRASS	
Circuit Form:	SPST-NO or SPST-NC	
Electrical Connection:	8-32 SCREW TERMINALS	
Diaphragm Material:	BUNA N	

OPTIONAL SPECIFICATIONS

Example - how to order: **SM- 2 A - 9 5 R / W L**

SM- - /

MEDIA CONNECTION

- 1- 1/4" NPT MALE
- 2- 1/8" NPT MALE
- 6- 7/16" - 20 SAE O-RING (- 4)
- 14- 1/2" NPT MALE - 1/8" NPT FEMALE
- 17- 1/4" BSPP MALE (G1/4")
- 28- 1/8" BSPP MALE (G1/8")

FIXED SET POINT

2 - 120 PSI

CIRCUIT FORM

- A - SPST-NO
- B - SPST-NCB
- C - SPDT

SETTING DIRECTION

- R - RISING
- F - FALLING

ELECTRICAL OPTIONS

- WL- WIRE LEADS 18"
- QC- 1/4" SPADE CONNECTION
- WP- WEATHER PACK
- HR- DIN43650A CONNECTOR
- MP- METRI-PACK
- AT - 10 AMP
- GG - INTERNAL GROUND
- AU - GOLD CONTACTS