

NASON




MODEL VM (formerly SMV)

- SNAP ACTION SWITCH
- FACTORY PRESET
- NEMA 4, 13

OPTIONS

- 10 AMP CONTACT
- GOLD CONTACT FOR LOW CURRENT APPLICATION
- WIDE RANGE OF DIAPHRAGM MATERIALS

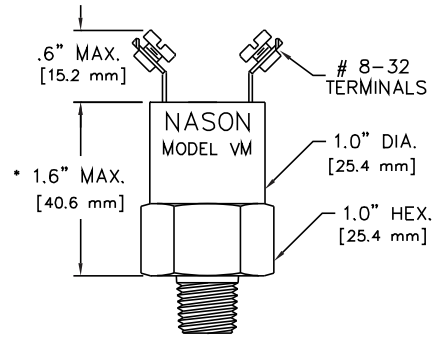

* 2.16" [54.9 mm] For 1/8 pipe connections

STANDARD SPECIFICATIONS

Set Point Range:	4" - 30" Hg	(102mm - 762mm Hg)
Set Point Tolerance:	±1" Hg OR 5%	(25mm Hg)
Maximum Operating Pressure:	250 PSI	(17 BAR)
Current Rating:	5 AMP	
Differential:	20-40%	
Media Connection:	1/4" NPT MALE BRASS	
Circuit Form:	SPST-NO or SPST-NC	
Electrical Connection:	8-32 SCREW TERMINALS	
Diaphragm Material:	BUNA N	

OPTIONAL SPECIFICATIONS

Example - how to order: **VM-11A-10R/WP**

VM--/

MEDIA CONNECTION

- 1- 1/4" NPT MALE
- 2- 1/8" NPT MALE
- 11- 9/16" SAE O-RING (-6)
- 17- 1/4" BSPP MALE (G1/4")

FIXED SET POINT

4" - 30" HG

CIRCUIT FORM

- A - SPST-NO
- B - SPST-NC
- C - SPDT

SETTING DIRECTION

- R - RISING
- F - FALLING

ELECTRICAL OPTIONS

- WL- WIRE LEADS 18"
- QC- 1/4" SPADE CONNECTION
- WP- WEATHER PACK
- HR- DIN43650A CONNECTOR
- MP- METRI-PACK
- AT - 10 AMP
- GG - INTERNAL GROUND
- AU - GOLD CONTACTS

8/00