

NASON


MODEL VP (formerly SPV)



- SNAP ACTION SWITCH
- FACTORY PRESET/FIELD ADJUSTABLE
- NEMA 4, 13

OPTIONS

- 25 AMP CONTACT
- GOLD CONTACT FOR LOW CURRENT APPLICATION
- WIDE RANGE OF DIAPHRAGM MATERIALS

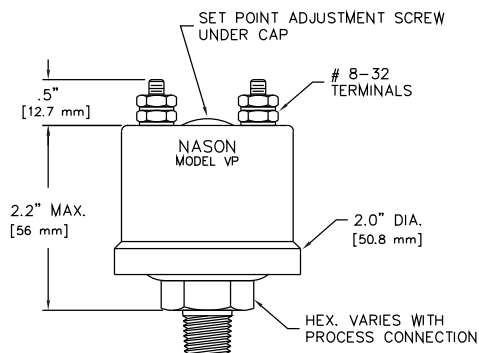

STANDARD SPECIFICATIONS

Set Point Range:	1" - 30" Hg	(25mm - 762mm Hg)
	20" - 410" H ₂ O	
Set Point Tolerance:	±.5" OR 5%	(13mm Hg)
Maximum Operating Pressure:	250 PSI	(17 BAR)
Current Rating:	10 AMP	
Differential:	20-40%	
Media Connection:	1/4" NPT MALE STEEL	
Circuit Form:	SPST-NO or SPST-NC	
Electrical Connection:	8-32 SCREW TERMINALS	
Diaphragm Material:	BUNA N	

OPTIONAL SPECIFICATIONS

Example - how to order: **VP-1 A - 2 5 R / M P**

VP- - /

MEDIA CONNECTION

- 1- 1/4" NPT MALE
- 11- 9/16"-18 SAE O-RING (-6)
- 13- 1/2"-20 SAE O-RING (-5)
- 17- 1/4" BSPP MALE (G 1/4")

CIRCUIT FORM

- A - SPST-NO
- B - SPST-NC
- C - SPDT

ADJUSTMENT RANGE

- 1-5 Hg (14-70" H₂O)
- 4-15 hg (55-200" H₂O)
- 10-30 HG (140-410" H₂O)

SETTING DIRECTION

- R - RISING
- F - FALLING
- J - RISING ADJUSTABLE
- G - FALLING ADJUSTABLE

ELECTRICAL OPTIONS

- WL- WIRE LEADS 18"
- QC- 1/4" SPADE CONNECTION
- WP- WEATHER PACK
- HR- DIN43650A CONNECTOR
- MP- METRI-PACK
- AT - 10 AMP
- GG - INTERNAL GROUND
- AU - GOLD CONTACTS

8/00