

NASON


MODEL WX (formerly WS/WL)



- SNAP ACTION SWITCH
- FACTORY PRESET/FIELD ADJUSTABLE

OPTIONS

- 10 AMP CONTACT
- GOLD CONTACT FOR LOW CURRENT APPLICATION
- WIDE VARIETY OF DIAPHRAGM MATERIALS
- NEMA 4, 13

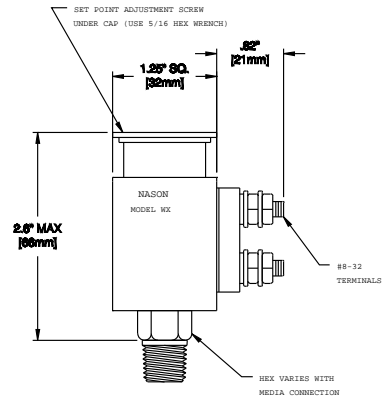

STANDARD SPECIFICATIONS

Set Point Range:	50-5000 PSI	(1.38 - 289 BAR)
Set Point Tolerance:	±5 PSI OR 5%	(.34 BAR)
Maximum Operating Pressure:	5000 PSI	(344 BAR)
Proof Pressure:	15000 PSI	(1034 BAR)
Differential:	3-10%	
Current Rating:	5 AMP	
Media Connection:	1/4" NPT MALE STEEL	
Circuit Form:	SPST-NO or SPST-NC	
Electrical Connection:	8-32 SCREW TERMINALS	
Diaphragm Material:	BUNA N	

OPTIONAL SPECIFICATIONS

Example - how to order: **WX-2A-0100R/EL**

WX- - /

MEDIA CONNECTION

- 1-1/4" NPT MALE
- 2-1/8" NPT MALE
- 4-7/16"-20 SAE 37° FLARE (-4)
- 6-7/16"-20 SAE O-RING (-4)
- 11-9/16"-18 SAE O-RING (-6)

ADJUSTMENT RANGES

- 50-150 PSI
- 140-400 PSI
- 300-800 PSI
- 700-2500 PSI
- 2000-5000 PSI

CIRCUIT FORM

- A - SPST-NO
- B - SPST-NC
- C - SPDT

SETTING DIRECTION

- R - RISING
- J - RISING ADJUSTABLE
- F - FALLING
- G - FALLING ADJUSTABLE

ELECTRICAL OPTIONS

- WL- WIRE LEADS 18"
- QC- 1/4" SPADE CONNECTION
- WP- WEATHER PACK
- HR- DIN43650A CONNECTOR
- MP- METRI-PACK
- AT - 10 AMP
- GG - INTERNAL GROUND
- AU - GOLD CONTACTS