General Description

Series 910 hand pumps are double-acting providing primary, backup or emergency hydraulic power. The hand pumps can be utilized anywhere; at any time, that hydraulic power is required, since the hand pump does not require an electrical or mechanical power source. They can be mounted in any position.


Operation


Piston Stroke — Direction A


Chamber C1 draws in fluid through INLET while chamber C2 discharges fluid through OUTLET.

Piston Stroke — Direction B

Volume in chamber C1 is transferred to chamber C2. Since chamber C2 holds half the volume of chamber C1, half of the fluid in chamber C2 is discharged through the OUTLET port.



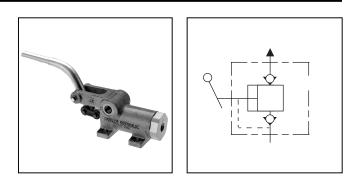



Features

- Lightweight, double-acting hand pump delivers 33 cc (2 cu. in.) per cycle, 2 strokes
- Provides long maintenance-free service for any application where auxiliary hydraulic power is required

Specifications


Operating Pressure Range	0 to 103 Bar (1500 PSI) 1500 PSI based on	Materials:	
	29 kg (64 lbs.) handle force at 578 mm (22.75 in.) handle/arm length	Body	Aluminum alloy
		Piston	
Displacement	33 cc (2 cu. in.) per cycle 2 strokes	Handle Extension	Steel
		Poppets	Stainless steel type 303
Operating Temperature Range	-40°C to 121°C (-40°F to 250°F)	Springs	Stainless steel Type AMS5688
Operating Arc	60°	O-Rings	Synthetic rubber
Fluids	Hydraulic oil	Backup Rings	PTFE
Sizes	SAE 6, SAE 8	Scraper	Synthetic rubber
Type Ports	SAE	Molded Seal	Synthetic rubber
Mounting	Flanges (4) with 7 mm dia (.281 in. dia.) holes	Handle	Extension furnished 508 mm (20 in.) long. Total 578 mm (22.75 in.)

repcat-h.p65, dd, fn




Dimensions

*Inch equivalents for millimeter dimensions are shown in (**)

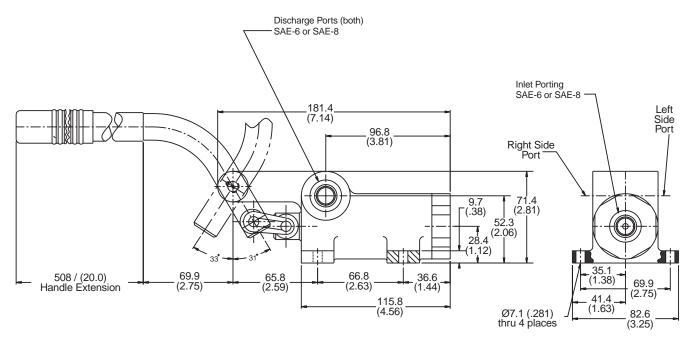



Ordering Information

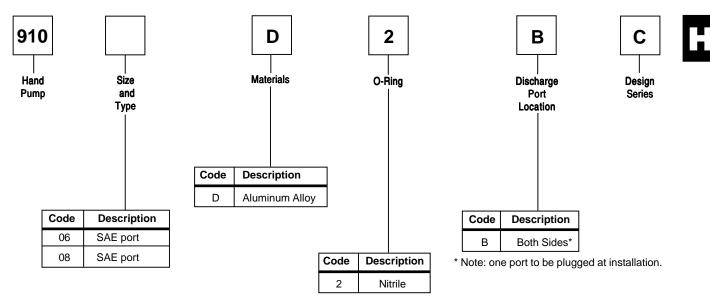

Weight: 2.3 kg (5 lbs.)

repcat-h.p65, dd, fn

