



SIGHT LEVEL GAUGES

ALG Series



Part Numbers				Dimensions		
Back Mount Gauges		Front Mount Gauges		A	B	C
Sight Only	with Thermometer	Sight Only	with Thermometer	Mounting Centers	Sight Glass	Overall Length
ALG-3	ALG-3T	N/A	N/A	3"	1 1/2"	4 5/8"
ALG-5	ALG-5T	FMALG-5	FMALG-5T	5"	3 1/2"	6 5/8"
ALG-10	ALG-10T	FMALG-10	FMALG-10T	10"	8 1/2"	11 5/8"

VESCOR Standard Fluid Sight Level Gauges are available in three sizes 3", 5" and 10". Gauges are available with or without thermometer in standard back mount design or optional front mount design.

Benefits and Features:



- Provides positive check of fluid level and temperature
- Rugged aluminum construction
- Durable pyrex glass tube
- 70 PSI max. pressure
- Thermometer with readings in centigrade and fahrenheit
- Buna-N O'-ring seals
- 250° F maximum temperature
- Minimum protrusion from reservoir

Mounting Information


- Standard back mount gauges require access to reservoir. (2) 17/32 diameter holes to match mounting centers are required.
- Standard front mount gauges do not require access to reservoir. Gauge can be installed from the outside on (2) 1/2-20 tapped holes (when wall thickness permits) or (2) 1/2-20 hex nuts welded inside reservoir to match mounting centers.

Ordering Information

- Order sight level gauge by VESCOR part numbers
- For Viton seals add suffix -V (i.e. ALG5T-V)
- For EPDM seals add suffix -EP (i.e. ALG5T-EP)

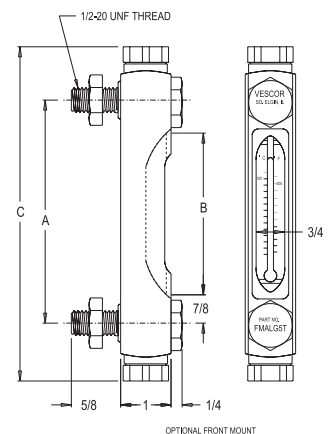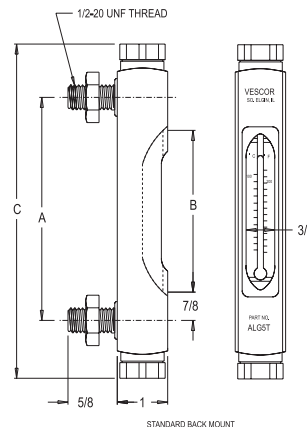

VSLG (economy) Series



VESCOR VSLG5T (Economy) Series Sight Level Gauges are available in standard 5" size. Standard gauges are available with thermometer only and with standard front mount design.

Benefits and Features:

- Low Cost
- Steel body
- Durable black finish
- Trogamid protection glass
- Available from stock
- Provides positive check of fluid level and temperature
- Galvanized steel mounting bolts
- Thermometer readings in centigrade and fahrenheit
- Buna-N O'Ring seals

Mounting Information

Standard front mount gauge do not require access to reservoir. Gauge can be installed from the outside on (2) 1/2-13NC tapped holes (when wall thickness permit) or (2) 1/2-13NC hex nut welded inside reservoir to match mounting hole centers.

Ordering Information -Order sight level gauge by VESCOR part number

Vescor Part Number	Dimensions					
	A	B	C	D	E	F
VSLG5T	6.97	1.88	.71	2.88	5.00	1/2-13NC