




END COVERS / HEATERS

Baffle Extensions

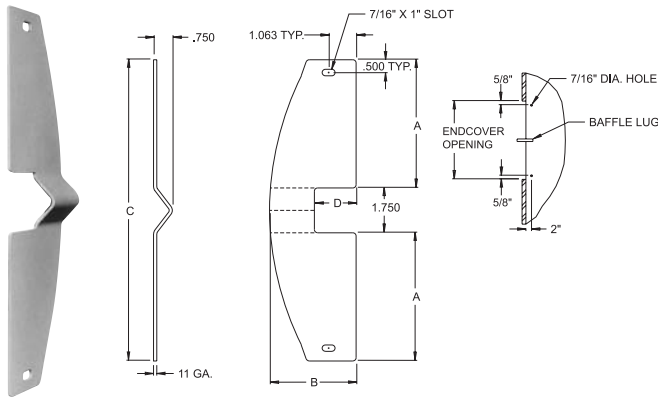


VESCOR® Baffle Extensions are used to extend baffle into endcover dome to restrict the flow of fluid around endcover area. Unique design allows for installation over existing baffle lug.

Installation:

Drill (2) 7/16" dia. holes in baffle as shown. Bolt baffle extension with 3/8-16 bolts. Adjust extension to desired position.

Vescor Part Number	End Cover Size	Dimensions			
		A	B	C	D
3924	12"	4"	4"	9¾"	2"
3925	14"	5"	4"	11¾"	2½"
3926	16"	5¾"	4¼"	12"	2½⅛"
3927	18"	7"	4¾"	15¾"	3½"

Immersion Heaters

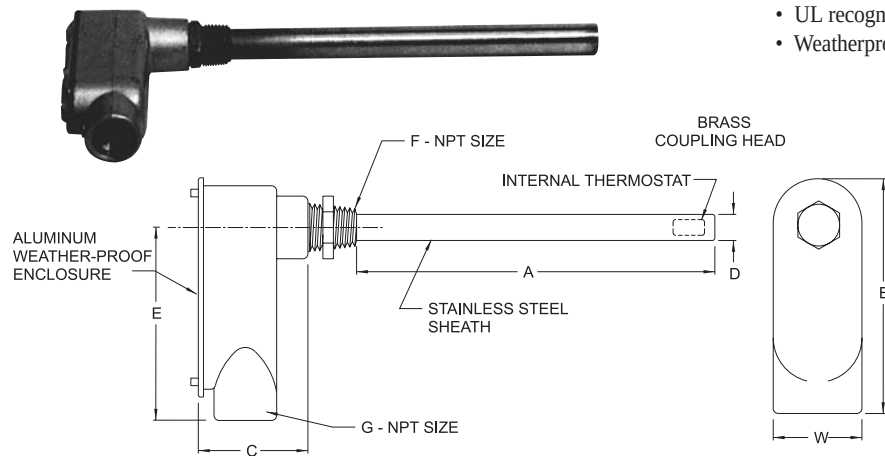

Features

- Keeps oil at 60° to 70° F.
- Automatic built-in fixed setting thermostat normally closed
- Will not burn oil
- UL recognized and CSA certified
- Weatherproof wiring enclosure (NEMA 4)

Notes

1. Heaters must be mounted horizontally and immersed at all times.
2. Heaters over 10 amps, 480 volt, or three phase, must be used with a contactor. See instruction sheet.
3. Three phase available on ET 8 models. Add -3 to the model number. Example: ET 8-2502-3.
4. For tanks larger then 500 gallon use multiple heaters or consult factory for information on higher wattage heaters.
5. Amps = Watts ÷ Volts for single phase.
6. Amps = Watts ÷ (Volts x 1.73) for three phase.

Vescor Part Number	Reservoir Size - Gals	Wattage	Volts	NPT Size		Dimensions					
				F	G	A	B	C	D	E	W
ET 2-121	up to 10	125	120	½"	½"	7"	4.5"	2.2"	.62"	3.6"	1.3"
ET 2-251	up to 25	250	120	½"	½"	8"	4.5"	2.2"	.62"	3.6"	1.3"
ET 2-252	up to 25	250	240	½"	½"	8"	4.5"	2.2"	.62"	3.6"	1.3"
ET 3-501	25-50	500	120	¾"	¾"	12.6"	5.1"	2.5"	.75"	4.1"	1.5"
ET 3-502	25-50	500	240	¾"	¾"	12.6"	5.1"	2.5"	.75"	4.1"	1.5"
ET 3-504	25-50	500	480	¾"	¾"	12.6"	5.1"	2.5"	.75"	4.1"	1.5"
ET 3-1001	50-100	1000	120	¾"	¾"	22.6"	5.1"	2.5"	.75"	4.1"	1.5"
ET 3-1002	50-100	1000	240	¾"	¾"	22.6"	5.1"	2.5"	.75"	4.1"	1.5"
ET 3-1004	50-100	1000	480	¾"	¾"	22.6"	5.1"	2.5"	.75"	4.1"	1.5"
ET 8-2502	100-250	2500	240	2"	1¼"	23"	8.2"	3.7"	1.9"	6.7"	2.8"
ET 8-2504	100-250	2500	480	2"	1¼"	23"	8.2"	3.7"	1.9"	6.7"	2.8"
ET 8-5002	250-500	5000	240	2"	1¼"	44"	8.2"	3.7"	1.9"	6.7"	2.8"
ET 8-5004	250-500	5000	480	2"	1¼"	44"	8.2"	3.7"	1.9"	6.7"	2.8"