



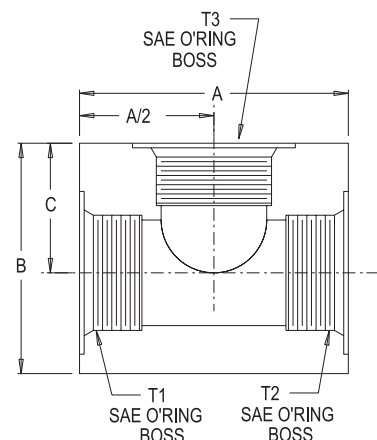

SAE COUPLINGS

SAE Straight Thread Tee



MATERIAL: C1117 C.R.S. Bar

Max. 3000 PSI Working Pressure

Vescor Part Number	Thread T1	Thread T2	Thread T3	T1 SAE Number	T2 SAE Number	T3 SAE Number	Dimensions			
							A	B	C	D
1040	2½-12	2½-12	2½-12	-32	-32	-32	5.000	4.000	2.187	4.000
1041	2½-12	2½-12	1⅞-12	-32	-32	-24	5.000	3.500	2.000	4.000
1042	2½-12	1⅞-12	2½-12	-32	-24	-32	5.000	4.000	2.187	4.000
1043	2½-12	1⅞-12	1⅞-12	-32	-24	-24	4.125	3.500	2.000	3.500
1044	1⅞-12	1⅞-12	2½-12	-24	-24	-32	4.125	3.500	2.000	3.500
1045	1⅞-12	1⅞-12	1⅞-12	-24	-24	-24	4.125	3.500	2.000	3.500
1046	1⅞-12	1⅞-12	1⅝-12	-24	-24	-20	4.125	3.500	2.000	3.500
1047	1⅞-12	1⅝-12	1⅞-12	-24	-20	-24	4.125	3.500	2.000	3.500
1048	1⅞-12	1⅝-12	1⅝-12	-24	-20	-20	4.125	3.500	2.000	3.500
1049	1⅝-12	1⅝-12	1⅞-12	-20	-20	-24	3.500	2.750	1.625	2.750
1050	1⅝-12	1⅝-12	1⅝-12	-20	-20	-20	3.500	2.750	1.625	2.750
1051	1⅝-12	1⅝-12	1⅝½-12	-20	-20	-16	3.500	2.750	1.625	2.750
1052	1⅝-12	1⅝½-12	1⅝-12	-20	-16	-20	3.500	2.750	1.625	2.750
1053	1⅝-12	1⅝½-12	1⅝½-12	-20	-16	-16	3.500	2.750	1.625	2.750
1054	1⅝½-12	1⅝½-12	1⅝-12	-16	-16	-20	3.250	2.500	1.500	2.500
1055	1⅝½-12	1⅝½-12	1⅝½-12	-16	-16	-16	3.250	2.500	1.500	2.500
1056	1⅝½-12	1⅝½-12	1⅝½-12	-16	-16	-12	3.250	2.500	1.500	2.500
1057	1⅝½-12	1¼-12	1⅝½-12	-16	-12	-16	3.250	2.500	1.500	2.500
1058	1⅝½-12	1¼-12	1⅝½-12	-16	-12	-12	3.250	2.500	1.500	2.500
1059	1¼-12	1¼-12	1⅝½-12	-12	-12	-16	3.000	2.125	1.312	2.125
1060	1¼-12	1¼-12	1¼-12	-12	-12	-12	3.000	2.125	1.312	2.125
1061	1¼-12	1¼-12	⅞-14	-12	-12	-10	3.000	2.125	1.312	2.125
1062	1¼-12	⅞-14	⅞-14	-12	-10	-12	3.000	2.125	1.312	2.125
1063	1¼-12	⅞-14	⅞-14	-12	-10	-10	3.000	2.125	1.312	2.125
1064	⅞-14	1¼-12	⅞-14	-10	-12	-10	2.875	2.000	1.312	2.000
1065	⅞-14	⅞-14	⅞-14	-10	-10	-10	2.875	2.000	1.312	2.000
1066	⅞-14	⅞-14	¾-16	-10	-10	-8	2.875	2.000	1.312	2.000
1067	⅞-14	¾-16	⅞-14	-10	-8	-10	2.875	2.000	1.312	2.000
1068	⅞-14	¾-16	¾-16	-10	-8	-8	2.875	2.000	1.312	2.000
1069	¾-16	¾-16	⅞-14	-8	-8	-10	2.625	1.750	1.125	1.750
1070	¾-16	¾-16	¾-16	-8	-8	-8	2.625	1.750	1.125	1.750
1071	¾-16	¾-16	⅞½-18	-8	-8	-6	2.625	1.750	1.125	1.750
1072	¾-16	⅞½-18	¾-16	-8	-6	-8	2.625	1.750	1.125	1.750
1073	¾-16	⅞½-18	⅞½-18	-8	-6	-6	2.625	1.750	1.125	1.750
1074	⅞½-18	⅞½-18	⅞-14	-6	-6	-10	2.625	1.750	1.125	1.750
1075	⅞½-18	⅞½-18	⅞½-18	-6	-6	-6	2.625	1.750	1.125	1.750

NOTE: WITH VESCORS' POLICY OF CONSTANTLY IMPROVING ITS PRODUCTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.