



CUSH-A-CLAMPS


U-Bolt Series

Designed for the tough jobs, the U-Bolt Series secures pipe runs to any flat surface. The cushion design provides total load distribution, allowing the U-Bolt to become a full contact hanger, eliminating knife-edge loading.

The U-Bolt traps and secures the cushion in place to prevent lateral movement, while nylon insert locknuts provide a positive lock. Available in electro-galvanized steel or 316 stainless steel.

Material

U-Bolt-steel with electro-galvanized finish or 316 stainless
Cushion-Thermoplastic elastomer.

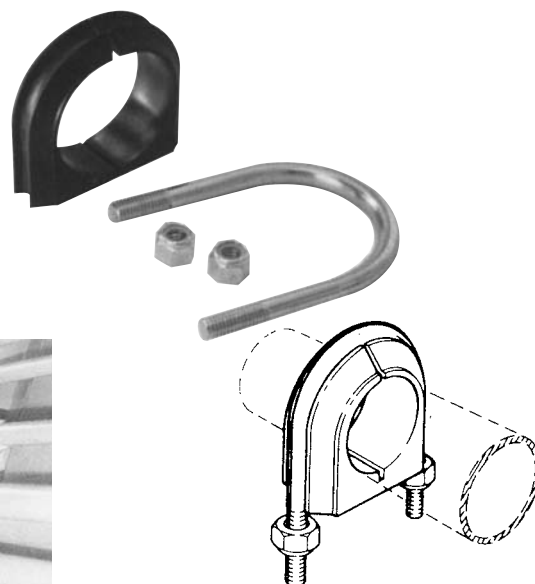


Specify steel or 316 stainless steel when ordering


U-Bolt Series conforms to MIL-S-901D for shock testing
* 8" thru 12" features a two-piece cushion design

ORDERING INFORMATION

Assembly Part Number	Nominal Pipe Size	A Dia.	B Radius	C	D	E	F	G	H
UB1/2PA	1/2"	.84	.80	1.60	1.50	.67	.68	1/4"	1/4-20 UNC-2B
UB3/4PA	3/4"	1.05	.90	1.80	1.60	.78	.68	1/4"	1/4-20 UNC-2B
UB1PA	1	1.31	1.02	2.05	1.70	.91	.68	1/4"	1/4-20 UNC-2B
UB1-1/4PA	1 1/4"	1.66	1.27	2.55	2.10	1.08	1.24	3/8"	3/8-16 UNC-2B
UB1-1/2PA	1 1/2"	1.90	1.40	2.80	2.20	1.19	1.24	3/8"	3/8-16 UNC-2B
UB2PA	2"	2.37	1.67	3.35	2.50	1.45	1.24	3/8"	3/8-16 UNC-2B
UB2-1/2PA	2 1/2"	2.87	1.95	3.90	3.00	1.69	1.24	1/2"	1/2-13 UNC-2B
UB3PA	3"	3.50	2.27	4.55	3.30	2.00	1.24	1/2"	1/2-13 UNC-2B
UB3-1/2PA	3 1/2"	4.00	2.52	5.05	3.90	2.50	1.24	1/2"	1/2-13 UNC-2B
UB4PA	4"	4.50	2.75	5.50	3.90	2.50	1.24	1/2"	1/2-13 UNC-2B
UB5PA	5"	5.56	3.25	6.56	4.50	3.03	1.24	1/2"	1/2-13 UNC-2B
UB6PA	6"	6.62	3.87	7.75	5.40	3.56	1.44	5/8"	5/8-11 UNC-2B
UB8PA	8"*	8.62	4.85	9.82	6.40	4.56	1.44	5/8"	5/8-11 UNC-2B
UB10PA	10"*	10.75	6.08	12.16	7.70	5.68	1.65	3/4"	3/4-10 UNC-2B
UB12PA	12"*	12.75	7.13	14.25	8.70	6.68	1.65	3/4"	3/4-10 UNC-2B



1/2" through 6" assembly





8" through 12" assembly

SPN Series

Features

- Light to medium duty steel clamp
- Neoprene cushion for electrical insulation and vibration absorption
- Neoprene meets specifications MIL R-30065 and MAMS-3209
- Steel clamps are zinc electroplated for corrosion resistance
- Color-Silver with black neoprene cushion

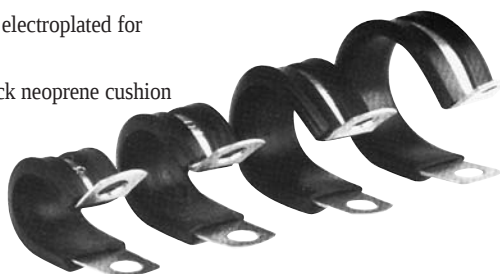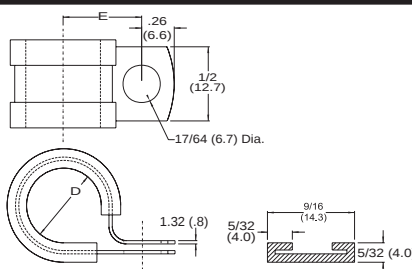

ORDERING INFORMATION

Assembly Part Number	Holding Dia. D	E inches (mm)	Assembly Part Number	Holding Dia. D	E inches (mm)
SPN-3	3/16 (4.8)	3/8 (9.5)	SPN-10	5/8 (15.9)	1 9/32 (15.1)
SPN-4	1/4 (6.4)	1 3/32 (10.3)	SPN-11	1 1/16 (17.5)	5/8 (15.9)
SPN-5	5/16 (7.9)	7/16 (11.1)	SPN-12	3/4 (19.1)	3/4 (19.1)
SPN-6	3/8 (9.5)	1 5/32 (11.9)	SPN-14	7/8 (22.2)	1 13/16 (20.6)
SPN-7	7/16 (11.1)	1/2 (12.7)	SPN-16	1 (25.4)	7/8 (22.2)
SPN-8	1/2 (12.7)	1 7/32 (13.5)	SPN-18	1 1/8 (28.6)	1 5/16 (23.8)
SPN-9	9/16 (14.3)	9/16 (14.3)	SPN-20	1 1/4 (31.8)	1 (25.4)

NOTE: WITH VESCORS' POLICY OF CONSTANTLY IMPROVING ITS PRODUCTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.