


8. Stack Valves

Function	Series	Cetop 3		Cetop 5		Cetop 7		Page
		Pressure Range (PSI)	Max. Flow (GPM)	Pressure Range (PSI)	Max. Flow (GPM)	Pressure Range (PSI)	Max. Flow (GPM)	
Pressure Relief	ZDV	100...1000 100...5000	21.1	100...1000 100...4600	37.0	100...940 100...4600	47.6	8 - 2
Pressure Reducing	ZDR	100...1000 100...5000	21.1	100...1000 100...4600	31.7	100...940 100...4600	42.3	8 - 4
Throttling + Check	ZRD	5000	21.1	4600	42.3	4600	42.3	8 - 6
Check Valve Pilot operated	ZRE	5000	15.9	4600	31.7	4600	42.3	8 - 8
Check Valve Direct operated	ZRV	5000	10.6	4600	26.4	-	-	8 - 10
Counter Balance	ZNS	1000...2500 2000...5000	15.9	1000...2500 2000...4600	31.7	-	-	8 - 11
Subplate with Relief Valve	GPDV	100...1000 100...5000	15.9	100...1000 100...4600	37.0	-	-	Denison
Accessories	Bolts, Tie rods Distributor plate Cover plate							8 - 12


ZDR-*01 - Cetop 3

1.6 / 1.8 kg

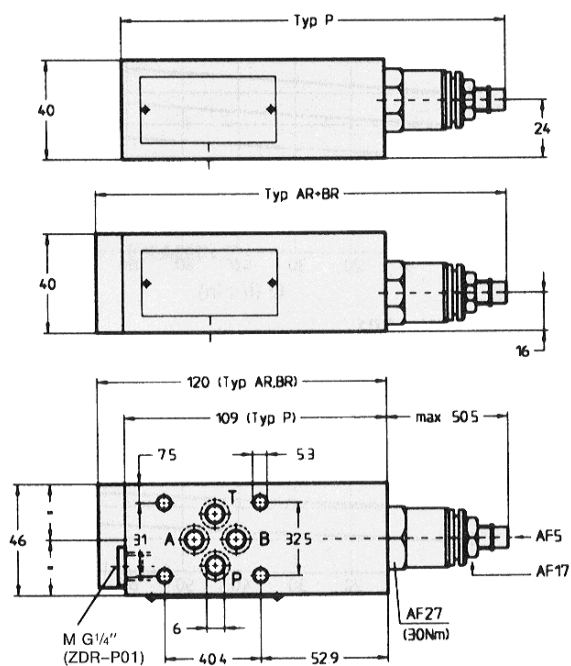


ZDR-*02 - Cetop 5




2.9 / 3.0 kg

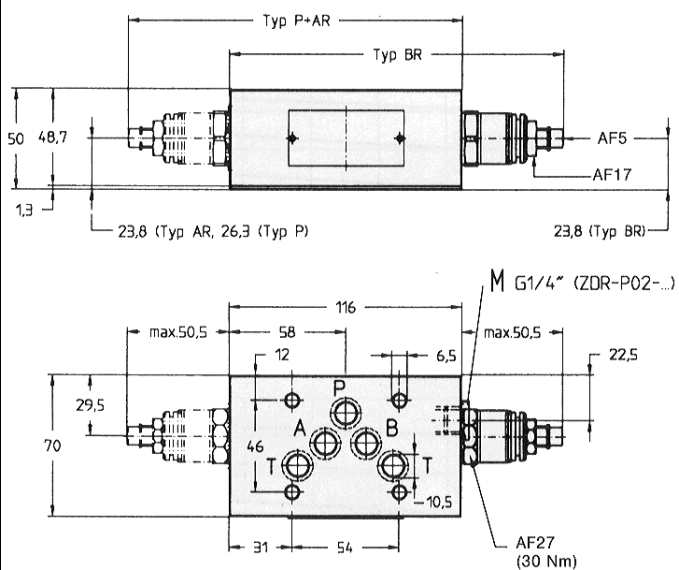

ZDR-*03 - Cetop 7

Weight: 7.6 kg

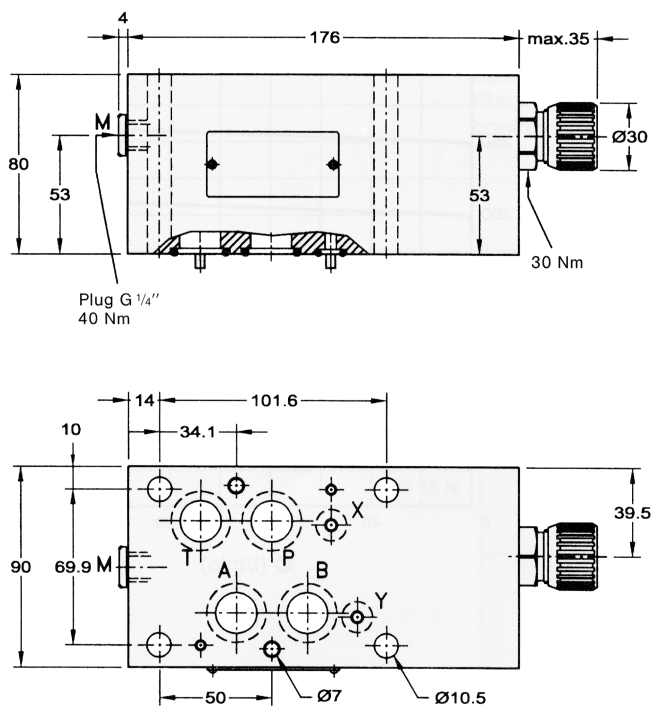

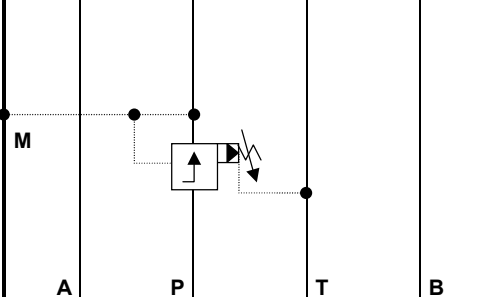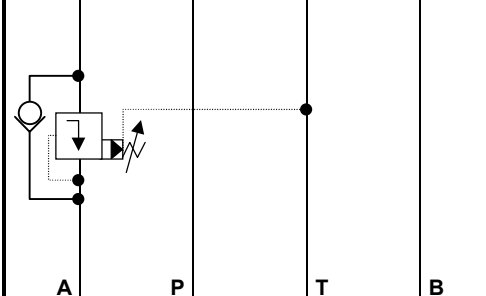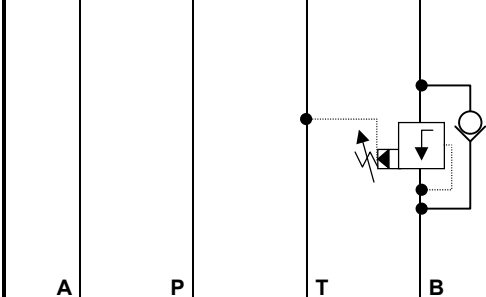Symbol ¹					Function	Cetop	Pressure (PSI)	Series	Code
	A	P	T	B	Pressure Reducing In P	3	100...1000 100...5000	ZDR-P01-1-S0-D1 ZDR-P01-5-S0-D1	098-91179-0 098-91211-0
						5	100...1000 100...4600	ZDR-P02-1-S0-D1 ZDR-P02-5-S0-D1	098-91050-0 098-91051-0
						7	100...940 100...4600	ZDR-P03-1-H0-B1 ZDR-P03-5-H0-B1	098-90957-0 098-90958-0
	A	P	T	B	Pressure Reducing In A With Check Valve (Except size 7)	3	100...1000 100...5000	ZDR-AR01-1-S0-D1 ZDR-AR01-5-S0-D1	098-91212-0 098-91213-0
						5	100...1000 100...4600	ZDR-AR02-1-S0-D1 ZDR-AR02-5-S0-D1	098-91052-0 098-91053-0
						7	100...940 100...4600	ZDR-A03-1-H0-B1 ZDR-A03-5-H0-B1	098-91315-0 098-90337-0
	A	P	T	B	Pressure Reducing In B With Check Valve (Except size 7)	3	100...1000 100...5000	ZDR-BR01-1-S0-D1 ZDR-BR01-5-S0-D1	098-91214-0 098-91215-0
						5	100...1000 100...4600	ZDR-BR02-1-S0-D1 ZDR-BR02-5-S0-D1	098-91054-0 098-91055-0
						7	100...940 100...4600	ZDR-B03-1-H0-B1 ZDR-B03-5-H0-B1	098-91317-0 098-90358-0

¹ Cetop 7 : X and Y ports not shown.