






CONTAINMENT STANDS



Each Containment Stand Includes:

1. (1) 3/4" NPT Drain with Plug
2. (4) Foot Mounting Pads (shipped loose)

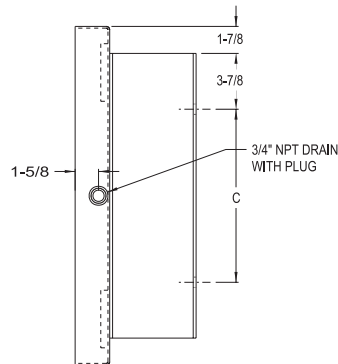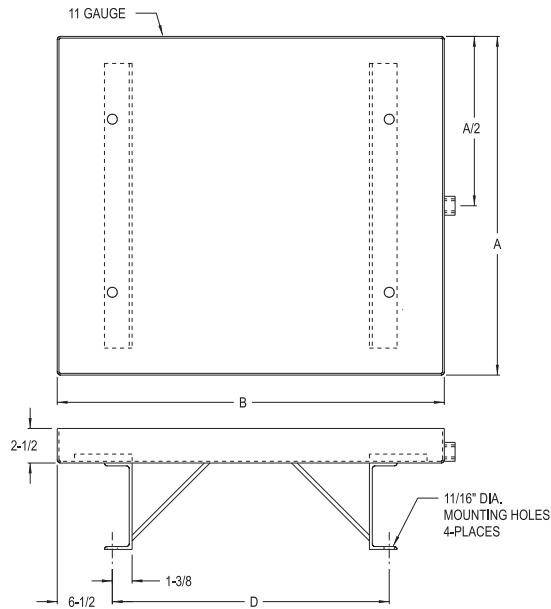

FOOT MOUNTING PADS
F = 4" (10 to 200 GALLON)
F = 5" (250 GALLON AND UP)

Reservoir Size	Vescor Part Number	Stand Dimensions				Reservoir Type				Shipping Weight	
		A	B	C	D	Style A	Style B	Style RB	Style RT	6"	12"
10	DSA-10-6	24 1/2"	28"	13"	21"	●		●	●	72#	91#
15	DSA-15-6	24 1/2"	32"	13"	25"	●		●		72#	91#
20	DSA-20-6	24 1/2"	36"	13"	30"	●			●	80#	99#
20	DSB-20-6	27 1/2"	38"	16"	31"		●	●		91#	113#
30	DSA-30-6	30 1/2"	42"	19"	35"	●		●		104#	127#
35	DSA-30-6	30 1/2"	42"	19"	35"				●	104#	127#
40	DSA-30-6	30 1/2"	42"	19"	35"	●		●		104#	127#
50	DSA-30-6	30 1/2"	42"	19"	35"	●		●	●	104#	127#
60	DSA-60-6	33 1/2"	54"	22"	47"	●				130#	155#
60	DSB-60-6	31 1/2"	44"	20"	37"		●	●		110#	135#
70	DSA-60-6	33 1/2"	54"	22"	47"				●	130#	155#
80	DSA-80-6	33 1/2"	66"	22"	59"	●				144#	180#
80	DSB-80-6	36 1/2"	53"	25"	46"		●	●		138#	171#
90	DSA-80-6	33 1/2"	66"	22"	59"				●	148#	184#

Reservoir Size	Vescor Part Number	Stand Dimensions				Reservoir Type				Shipping Weight	
		A	B	C	D	Style A	Style B	Style RB	Style RT	6"	12"
100	DSA-80-6	33 1/2"	66"	22"	59"	●				148#	184#
100	DSB-80-6	36 1/2"	53"	25"	46"		●	●		142#	181#
120	DSA-120-6	36 1/2"	66"	25"	59"	●	●	●		161#	190#
130	DSA-120-6	36 1/2"	66"	25"	59"				●	161#	190#
150	DSA-120-6	36 1/2"	66"	25"	59"	●	●	●		160#	189#
160	DSA-120-6	36 1/2"	66"	25"	59"				●	160#	189#
200	DSA-200-6	42 1/2"	78"	31"	71"	●	●	●		205#	238#
210	DSA-200-6	42 1/2"	78"	31"	71"				●	205#	238#
250	DSA-200-6	42 1/2"	78"	31"	71"		●			205#	238#
300	DSA-200-6	42 1/2"	78"	31"	71"	●				205#	238#
300	DSB-300-6	54 1/2"	88"	43"	81"		●	●		278#	314#
400	DSA-400-6	54 1/2"	78"	43"	71"	●				256#	298#
500	DSA-400-6	54 1/2"	78"	43"	71"	●				256#	298#

Note: For reservoir sizes not listed or custom sizes - consult factory

Part numbers are for 6" high containment stands.

For 12" High containment stands substitute -12 in part number – example: DSA-10-12