


AIR BREATHER FILTER





VESCOR® Air Breather Filter protects your hydraulic system from ingesting airborne particles. These breathers feature a large pleated surface area which remove airborne particles 3 micron and above with exceptional dirt holding capacity that extends the life of the breather and thus the length of time between servicing


Features


- 3 micron and above filtration
- · High capacity air flow
- Customer specified adapters: Bayonet flange (SAE J829)
 3/4" NPT (male)
- Heavy Duty Cork-Neoprene Gaskets provide a positive seal between flanges
- Adapters allow easy spin-on, spin-off changing of the air breather
- 4" Nylon Basket (assembly model only)

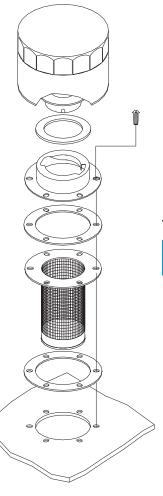









Technical and Dimensional Details

Part Number	Description	Normal Capacity	Air Flow PSI Drop	A Dia.	B Dim.	C Adapter	D Dim.
1306	Air Breather Filter Element Only	40 SCFM	.4 PSI at 20 SFM 1.25 PSI at 40 SCFM	3.75	3.25	N/A	N/A
1306-2	Air Breather with 3/4 NPT Adapter	40 SCFM		3.75	4.38	³ / ₄ " NPT (Male)	N/A
1306-3	Air Breather with Bayonet Flange Adapter	40 SCFM		3.75	4.50	SAE Bayonet	N/A
1306-4*	Air Breather Bayonet Fill Assembly	40 SCFM		3.75	4.50	SAE Bayonet	3.80

*NOTE: 1306-4 includes (1) air breather filter, (1) cap gasket, (1) flange gasket, (1) flange SAE J829, (1) 4" nylon strainer basket, (1) tank gasket, (6) mounting screws

Mounting Information

 3 /4" NPT (male) Adapter - Any standard 3 /4" NPT (female) threaded pipe port SAE Bayonet Flange Adapter - Any mating SAE bayonet flange adapter