


Lynch MANIFOLDS & VALVE PACKS

D05H(E) High Flow Subplate w/Relief - Nominal 3/4"

SPRP_05_SPSFUEE

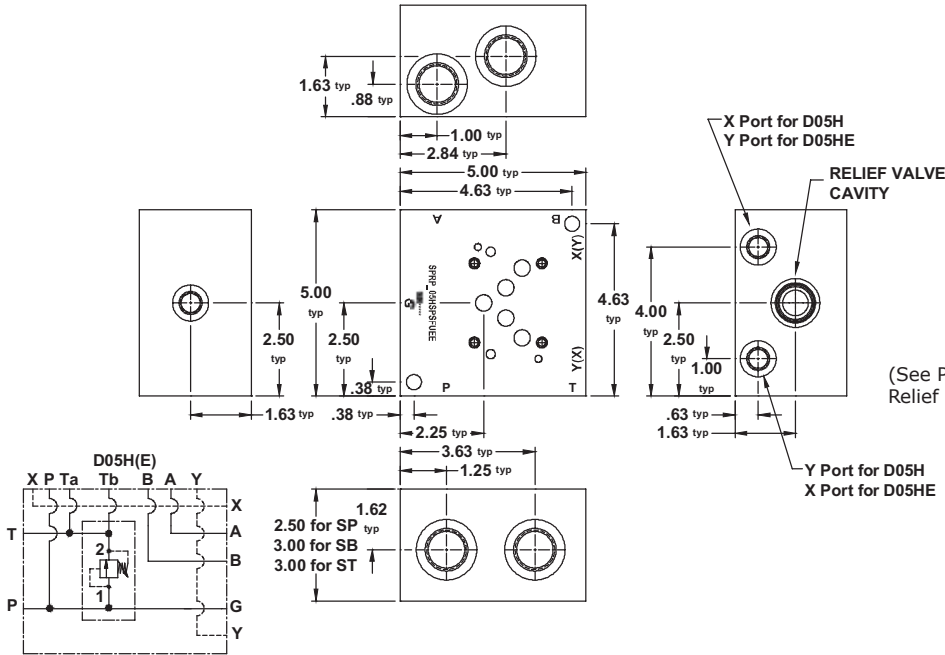

Mounting Kits include the following:

"SP" UNC Kit:
2 - 3/8"-16 x 3.00" SHCS
"SP" Metric Kit:
2 - M10-1.5 x 75 mm SHCS

"SB" UNC Kit:
2 - 3/8"-16 x 3.50" SHCS
2 - plugs
"SB" Metric Kit:
2 - M10-1.5 x 90 mm SHCS
2 - plugs


"ST" UNC Kit:
2 - 3/8"-16 x 3.50" SHCS
"ST" Metric Kit:
2 - M10-1.5 x 90 mm SHCS

(See Page 5.99.01 for Relief Cartridges)


5

SUBPLATES w/ CIRCUITS

SPRP_05_SBSFUEE - BOTTOM VIEW

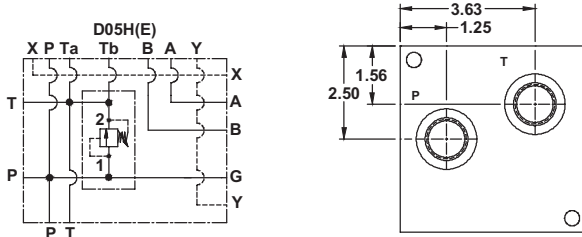

SPRP_05_STSFUEE - BOTTOM VIEW

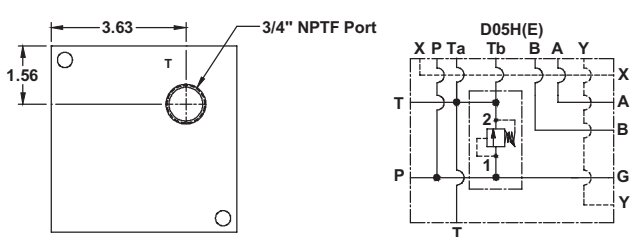

PART NUMBER SYSTEM

Aluminum D05H Side Ported Subplate with SAE 12 Ports & T-3A Relief Example: SPRPA05HSPSFUEE

TYPE	MATERIAL	VALVE PATTERN	PORTING STYLE	PORT CODE	MOUNTING THREADS & KIT	RELIEF CAVITY AND PILOT PORT OPTIONS																														
SPRP	Subplates with P to T Relief	SB: Side Ported with Bottom P & T Ports SP: Side Ported only ST: Side Ported with 3/4" NPTF "T" Port on Bottom only			<table border="1"> <tr> <td>U</td> <td>UNC Std for SAE & NPT</td> <td>D05 Valve</td> <td>1/4"-20 UNC x 0.75" dp</td> </tr> <tr> <td></td> <td></td> <td>Subplate</td> <td>3/8"-16 SHCS</td> </tr> <tr> <td>M</td> <td>Metric Std for BSP* & Metric</td> <td>D05 Valve</td> <td>M6 x 1.00 x .75" dp</td> </tr> <tr> <td></td> <td></td> <td>Subplate</td> <td>M10 x 1.50 SHCS</td> </tr> </table>	U	UNC Std for SAE & NPT	D05 Valve	1/4"-20 UNC x 0.75" dp			Subplate	3/8"-16 SHCS	M	Metric Std for BSP* & Metric	D05 Valve	M6 x 1.00 x .75" dp			Subplate	M10 x 1.50 SHCS	<table border="1"> <tr> <td>DE</td> <td>Common C10-2</td> </tr> <tr> <td>EE</td> <td>Sun T-3A</td> </tr> </table>	DE	Common C10-2	EE	Sun T-3A										
U	UNC Std for SAE & NPT	D05 Valve	1/4"-20 UNC x 0.75" dp																																	
		Subplate	3/8"-16 SHCS																																	
M	Metric Std for BSP* & Metric	D05 Valve	M6 x 1.00 x .75" dp																																	
		Subplate	M10 x 1.50 SHCS																																	
DE	Common C10-2																																			
EE	Sun T-3A																																			
	A: Aluminum D: Ductile Iron																																			
		05H: (USA Standard) NFPA T3.5.1-D05 Alt B 05E: ISO 4401-05-05 (EURO) NFPA T3.5.1-D05 Alt A																																		
					<table border="1"> <thead> <tr> <th>CODE</th> <th>TYPE</th> <th>P, T, A and B</th> <th>X & Y</th> <th>G</th> </tr> </thead> <tbody> <tr> <td>SF</td> <td>SAE</td> <td>12</td> <td>6</td> <td>6</td> </tr> <tr> <td>NF</td> <td>NPTF</td> <td>3/4"</td> <td>1/4"</td> <td>1/4"</td> </tr> <tr> <td>BF</td> <td>BSPP</td> <td>3/4"</td> <td>1/4"</td> <td>1/4"</td> </tr> <tr> <td>TF</td> <td>BSPT</td> <td>3/4"</td> <td>1/4"</td> <td>1/4"</td> </tr> <tr> <td>MF</td> <td>METRIC</td> <td>M27</td> <td>M10</td> <td>M10</td> </tr> </tbody> </table>	CODE	TYPE	P, T, A and B	X & Y	G	SF	SAE	12	6	6	NF	NPTF	3/4"	1/4"	1/4"	BF	BSPP	3/4"	1/4"	1/4"	TF	BSPT	3/4"	1/4"	1/4"	MF	METRIC	M27	M10	M10	
CODE	TYPE	P, T, A and B	X & Y	G																																
SF	SAE	12	6	6																																
NF	NPTF	3/4"	1/4"	1/4"																																
BF	BSPP	3/4"	1/4"	1/4"																																
TF	BSPT	3/4"	1/4"	1/4"																																
MF	METRIC	M27	M10	M10																																


NOTE: As a Non-Standard Option, Subplates with no Pilot Ports can be ordered by using "05T" for Valve Pattern Code and replacing the "E" at the end of the Part Number with an "A". An Example Part Number would be: SPRPA05TSPSFUEA

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application



D05H(E) High Flow Subplate w/Relief - Nominal 1"

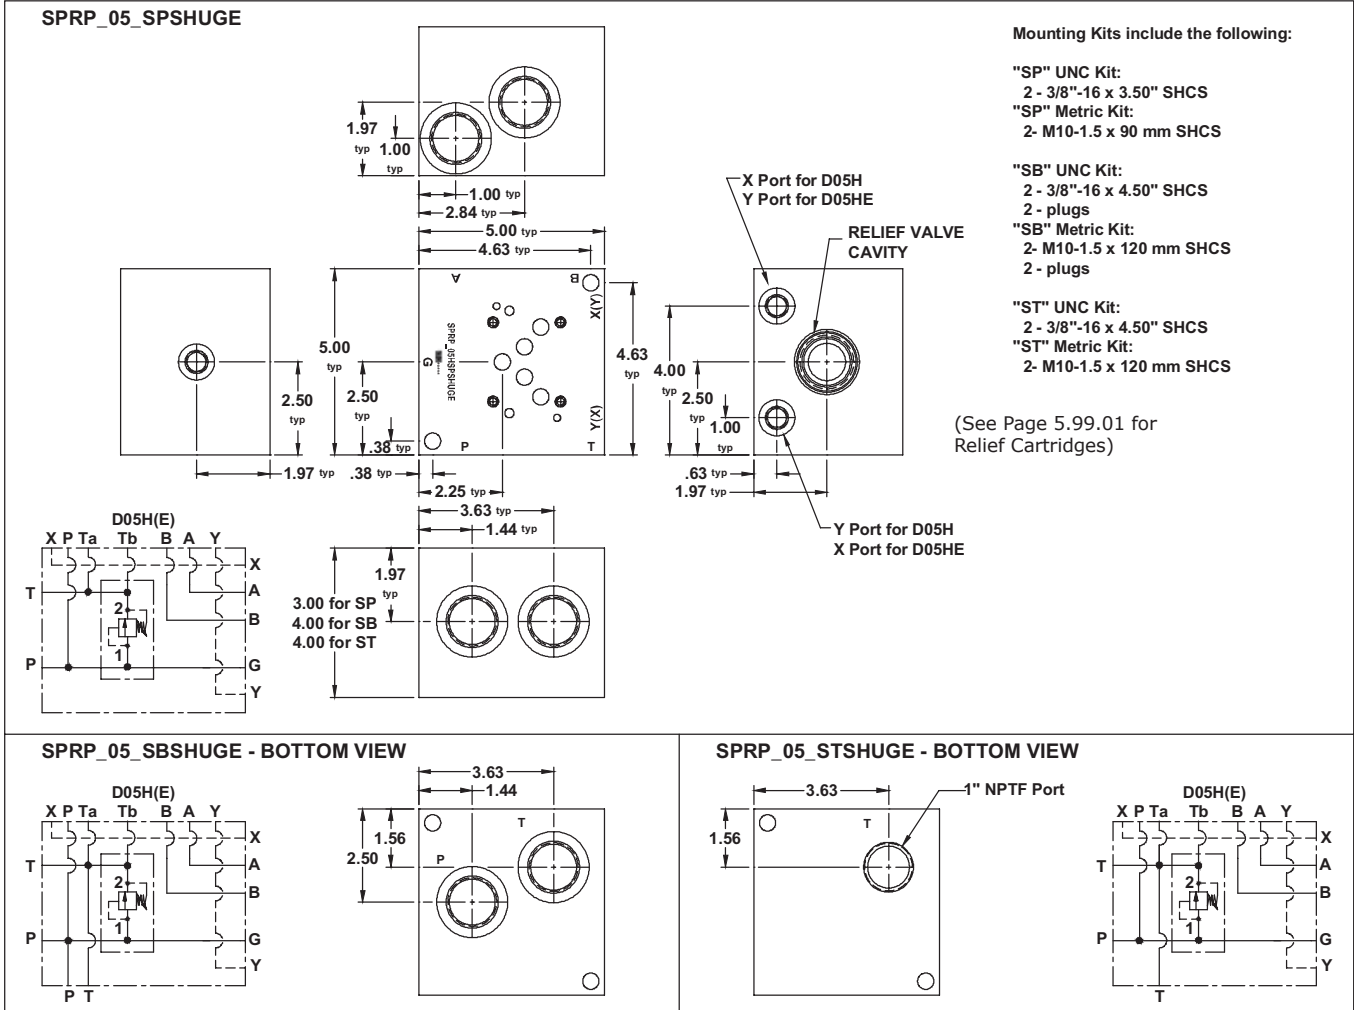


Mounting Kits include the following:

- "SP" UNC Kit:
2 - 3/8"-16 x 3.50" SHCS
- "SP" Metric Kit:
2 - M10-1.5 x 90 mm SHCS
- "SB" UNC Kit:
2 - 3/8"-16 x 4.50" SHCS
2 - plugs
- "SB" Metric Kit:
2 - M10-1.5 x 120 mm SHCS
2 - plugs
- "ST" UNC Kit:
2 - 3/8"-16 x 4.50" SHCS
- "ST" Metric Kit:
2 - M10-1.5 x 120 mm SHCS

(See Page 5.99.01 for Relief Cartridges)

PART NUMBER SYSTEM

Aluminum D05H Side Ported Subplate with SAE 16 Ports & T-16A Relief Example: **SPRPA05HSPSHUGE**

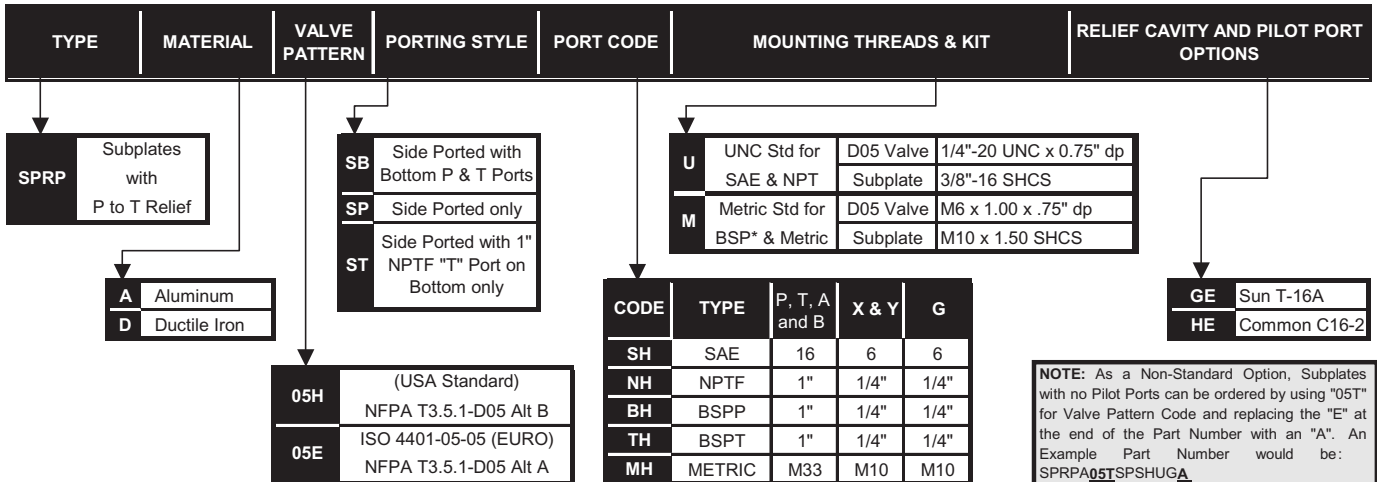

WE RESERVE THE RIGHT TO DISCONTINUE MODELS, OR CHANGE SPECIFICATIONS WITHOUT NOTICE OR INCURRING OBLIGATION

Lynch Products Can Be Modified to Suit Your Application

