





SAE COUPLINGS

SAE O'Ring Boss Full Couplings



MATERIAL: C1117 C.R.S. Bar

Max. 3000 PSI Working Pressure

Vescor Part Number	L Length	A Diameter	Thread T1	T1 SAE Number	Thread T2	T2 SAE Number
1020	1.500	.875	7/16-20 UNF-2B	-4	7/16-20 UNF-2B	-4
1021	1.375	1.000	9/16-18 UNF-2B	-6	9/16-18 UNF-2B	-6
1022	1.500	1.250	3/4-16 UNF-2B	-8	3/4-16 UNF-2B	-8
1023	1.750	1.500	7/8-14 UNF-2B	-10	7/8-14 UNF-2B	-10
1024	2.000	1.625	1 1/16-12 UNF-2B	-12	1 1/16-12 UNF-2B	-12
1025	2.000	2.000	1 3/16-12 UNF-2B	-14	1 3/16-12 UNF-2B	-14
1026	2.000	2.000	1 5/16-12 UNF-2B	-16	1 5/16-12 UNF-2B	-16
1027	2.500	2.500	1 5/8-12 UNF-2B	-20	1 5/8-12 UNF-2B	-20
1028	2.500	2.500	1 7/8-12 UNF-2B	-24	1 7/8-12 UNF-2B	-24
1029	2.750	3.250	2 1/2-12 UNF-2B	-32	2 1/2-12 UNF-2B	-32
1030	1.500	1.250	3/4-16 UNF-2B	-8	9/16-18 UNF-2B	-6
1031	1.750	1.500	7/8-14 UNF-2B	-10	3/4-16 UNF-2B	-8
1032	2.000	1.625	1 1/16-12 UNF-2B	-12	7/8-14 UNF-2B	-10
1033	2.000	2.000	1 5/16-12 UNF-2B	-16	1 1/16-12 UNF-2B	-12
1034	2.500	2.500	1 5/8-12 UNF-2B	-20	1 5/16-12 UNF-2B	-16
1035	2.500	2.500	1 7/8-12 UNF-2B	-24	1 5/8-12 UNF-2B	-20
1036	2.000	1.625	1 1/16-12 UNF-2B	-12	3/4-16 UNF-2B	-8
1037	2.750	3.500	2 1/2-12 UNF-2B	-32	1 7/8-12 UNF-2B	-24



SAE Half Couplings

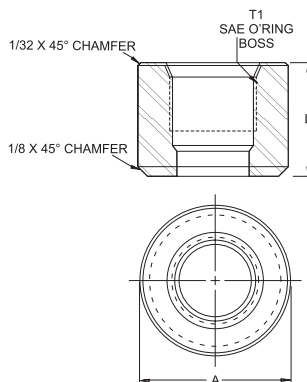

MATERIAL: Steel-C1117 C.R.S. Bar, Stainless Steel-Grade 316

Max. 3000 PSI Working Pressure

Vescor Steel Part Number	Vescor Stainless Steel Part Number	L Length	A Diameter	Thread T1	T1 SAE Number
V-6206	V-8906	.750	.875	7/16-20 UNF-2B	-4
V-6207	V-8907	.750	1.000	1/2-20 UNF-2B	-5
V-6208	V-8908	.750	1.000	9/16-18 UNF-2B	-6
V-6209	V-8909	.750	1.250	3/4-16 UNF-2B	-8
V-6210	V-8910	.875	1.500	7/8-14 UNF-2B	-10
V-6211	V-8911	1.000	1.625	1 1/16-12 UNF-2B	-12
V-6212	V-8912	1.000	2.000	1 3/16-12 UNF-2B	-14
V-6213	V-8913	1.250	2.000	1 5/16-12 UNF-2B	-16
V-6214	V-8914	1.250	2.500	1 5/8-12 UNF-2B	-20
V-6215	V-8915	1.250	2.500	1 7/8-12 UNF-2B	-24
V-6216	V-8916	1.375	3.250	2 1/2-12 UNF-2B	-32